



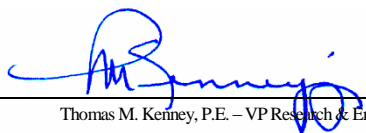
**Home Innovation**  
NGBS GREEN CERTIFIED™

THIS IS TO SIGNIFY THAT THE FOLLOWING  
PRODUCTS FOR RESIDENTIAL CONSTRUCTION

**KINGSPAN® GREENGUARD® EXTRUDED POLYSTYRENE  
INSULATION BOARD**

MANUFACTURED BY  
**KINGSPAN INSULATION LLC**

HAVE BEEN CERTIFIED FOR POINTS TOWARD NGBS GREEN  
CERTIFICATION TO THE ICC 700 NATIONAL GREEN BUILDING  
STANDARD AS DETAILED IN NGBS GREEN CERTIFIED PRODUCT  
REPORT #NGBSGCP-00136.

  
Thomas M. Kenney, P.E. – VP Research & Engineering

June 10, 2010  
Approval Date

May 31, 2016  
Expiration Date

**CERTIFICATE #00136**

This certificate is not a representation, warranty, or guarantee of product performance or certification of code compliance. For details of the product warranty, consult the product manufacturer.



NGBS Green Certified Product Report #NGBSGCP-00136

Products: Kingspan® GreenGuard® Extruded Polystyrene Insulation Board

Manufacturer: Kingspan Insulation LLC

The product(s) shown on this report have been independently verified as eligible products for use in achieving points toward project certification under ICC-700 National Green Building Standard. Home Innovation Research Labs authorizes accredited verifiers to award points toward certification without additional documentation when the product(s) is used as noted below.

2008 NATIONAL GREEN BUILDING STANDARD			
PRACTICE #	PRACTICE DESCRIPTION	POTENTIAL POINTS AVAILABLE	ADDITIONAL CONDITIONS OF USE TO AWARD POINTS
2008 NGBS 604.1(1)	Building materials w/ recycled content are used for at least 2 minor components.	1	Must be used in conjunction with another minor building component with 25 - 50% recycled content. Install per manufacturer's instructions. Install per code requirement.

2012 NATIONAL GREEN BUILDING STANDARD			
PRACTICE #	PRACTICE DESCRIPTION	POTENTIAL POINTS AVAILABLE	ADDITIONAL CONDITIONS OF USE TO AWARD POINTS
2012 NGBS 604.1(1)	Building materials w/ recycled content are used for at least 2 minor components.	1	Must be used in conjunction with another minor building component with 25 - 50% recycled content. Install per manufacturer's instructions. Install per code requirement.